


ALMA WCL 300 OP 1600 840 IP65 MD

Item number E010850325
GTIN 4015120850325

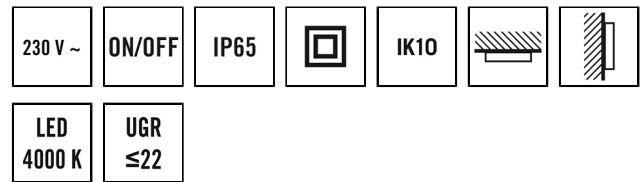

Technical data

GENERAL	
Device category	Wall and ceiling light
Remote controllable	–
Conformity	CE, EAC, RoHS, WEEE
Warranty	5 years
ATTACHMENT	
Installation type	Surface mounting
Installation position	Ceiling / wall
Type of connection	Push terminal
Connectable wire cross section	1.50 – 2.50 mm ²
Number of contacts	4
HOUSING	
Dimensions	Height/Depth 87 mm, Ø 300 mm
Weight	713 g
Material	UV-stabilised polycarbonate
Protection type	IP65
Permissible ambient temperature	0 °C...+40 °C
Impact resistance	IK10
Colour	white, similar to RAL 9003
ELECTRICAL VERSION	
Control system	ON/OFF
Protection class	II
Nominal voltage	220 - 240 V ~ / 50 - 60 Hz

Product description

- LED round light
- 16 W, light colour approx. 4000 K neutral white
- Enhanced protection type (IP65)
- Integrated high-frequency detector and an additional switching output
- Zero-cross switching for switching that protects the relay

Offers special product features like:

- Integrated HF motion detector

In-rush current	2.2 A / 98 µs
Leakage current	0.017 mA
Power consumption	300 mA

LIGHT	
Diffuser	opal
Light emission	direct
Beam angle	115 °
Unified Glare Rating	≤ 22
Flicker factor	< 3 %
Rated output P	16 W
Luminous flux	1600 lm
Luminous efficacy	100 lm/W
Colour temperature	4100 K
Colour rendering index Ra	> 80
Colour tolerance	2 SDCM


SENSORS	
Detection angle	360°
Detection range diagonally	Ø 15 m
Detection range head-on	Ø 15 m
Field of detection	177 m ²
Recommended installation height	2.5 m
Level of brightness	3 - 300 lx
Switch-off delay time	10 s...12 min (adjustable in steps)
Frequency range	5.8 GHz

DATA SHEET


ALMA WCL 300 OP 1600 840 IP65 MD

Item number GTIN
 E010850325 4015120850325

Dimension drawing




Light distribution

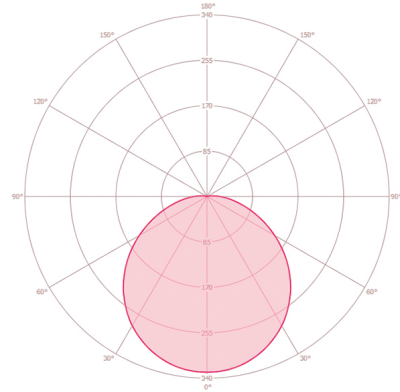

Field of detections

Detection range



■ Diagonally (A)	Ø 15 m
■ Frontal (B)	Ø 15 m