


ELLEN WCL 300 OP 1300 840 IP20

Item number E010850073
GTIN 4015120850073

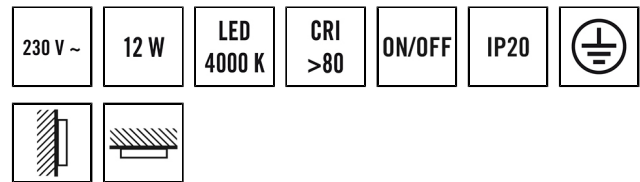

Technical data

GENERAL	
Device category	Wall and ceiling light
Included in delivery	2x wall plug, 2x screw
Remote controllable	–
Conformity	CE, EAC, RoHS, SundaHus, WEEE
Warranty	3-year
ATTACHMENT	
Installation type	Surface mounting
Installation position	Ceiling / wall
Type of connection	Push terminal
Connectable wire cross section	1.50 – 2.50 mm ²
Number of contacts	3
HOUSING	
Dimensions	Height/Depth 95 mm, Ø 300 mm
Weight	714 g
Material	Steel
Protection type	IP20
Permissible ambient temperature	0 °C...+50 °C
Impact resistance	IK07
Colour	white
Glow wire test in accordance with IEC 60695-2-10	650 °C
ELECTRICAL VERSION	
Control system	ON/OFF

Product description

- LED round light
- 12 W, light colour approx. 4000 K warm white
- Zero-cross switching for switching that protects the relay

Protection class	I
Nominal voltage	220 - 240 V ~ / 50 - 60 Hz
In-rush current	10.6 A / 123 µs
Stand-by consumption	0 W

LIGHT	
Diffuser	opal
Light emission	direct
Beam angle	120 °
Unified Glare Rating	≤ 22
Flicker factor	< 3 %
Rated output P	11 W
Luminous flux	1350 lm
Luminous efficacy	122 lm/W
Colour temperature	4000 K
Colour rendering index Ra	> 80
Colour tolerance	1 SDCM
Color Quality Scale	>80
L70B10 lifetime at 25 °C	90000 h
Lebensdauer L70B50 bei 25 °C	95000 h
Lebensdauer L80B10 bei 25 °C	60000 h
Life time L80B50 at 25 °C	60000 h
Lebensdauer L90B10 bei 25 °C	30000 h
Life time L90B50 at 25 °C	30000 h
Photobiological safety	RG0

SENSORS

DATA SHEET


ELLEN WCL 300 OP 1300 840 IP20

Item number **GTIN**
 E010850073 4015120850073


Accessories

Product designation	Item number	Product description	GTIN
Cover			
ELLEN COVER OP	E010850127	Cover for ELLEN series, opal	4015120850127


Dimension drawing



Light distribution

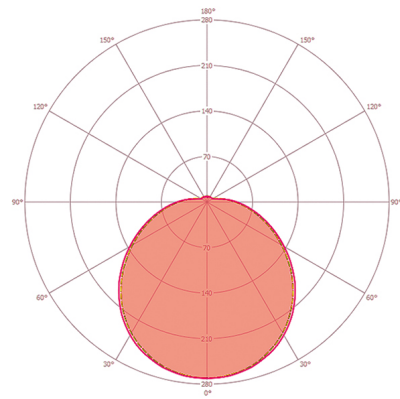


Field of detections



Detection range

Circuit diagram

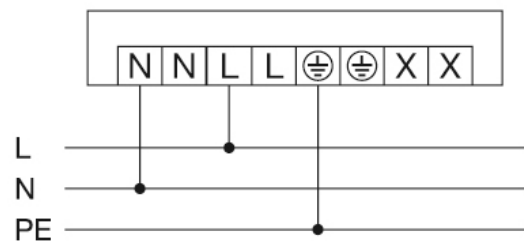

Standard operation